





BASIC INFORMATION ABOUT THE PRODUC

FIREPLACE

15a8-VG)



• Modern, compact freestanding fireplace, ideal as an additional heat source.

• Suitable for open spaces.

ECO DESIGN)

- High thermal efficiency for economical wood burning
- Paint coating designed for high temperatures.
- Air curtain on the front window and an aeration system on the rear wall.
- Combustion chamber lined with accumulation material equipped with removable grate and ash pan for easy ash removal.
- Three-stage aeration of the combustion chamber, controlled by a single damper.
- Optional fresh air intake for compatibility with mechanical ventilation.
- Double-polished fireplace ceramics with heat resistance of 800°C and stylish DECOR frame.
- Minimalist steel vertical grate.
- Decorative openwork in the upper lid for additional ventilation of the fireplace.

Nominal power [kW]	5,5
Heating load range [kW]	2,5-7
Thermal efficiency [%]	84
CO emissions (at 13% O2) [g/m3]	1,329
Pollen emission [g/m3]	0,036
Average fuel consumption [kg/h]	1,7
Glass dimensions [mm]	409 x 357
Flue diameter [mm]	129
Weight [kg]	82
Efficiency factor	112,8





GATTO S



TECHNICAL DRAWING AND DIMENSIONS




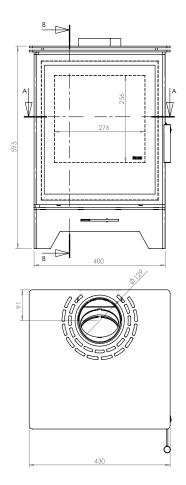



340

PRZEKRÓJ A-A SKALA 1 : 7



PRZEKRÓJ B-B SKALA 1 : 7

GATTO S Masa: 82kg

GATTOS